


37°27'45"N
126°26'21"E

ELEV **7** m






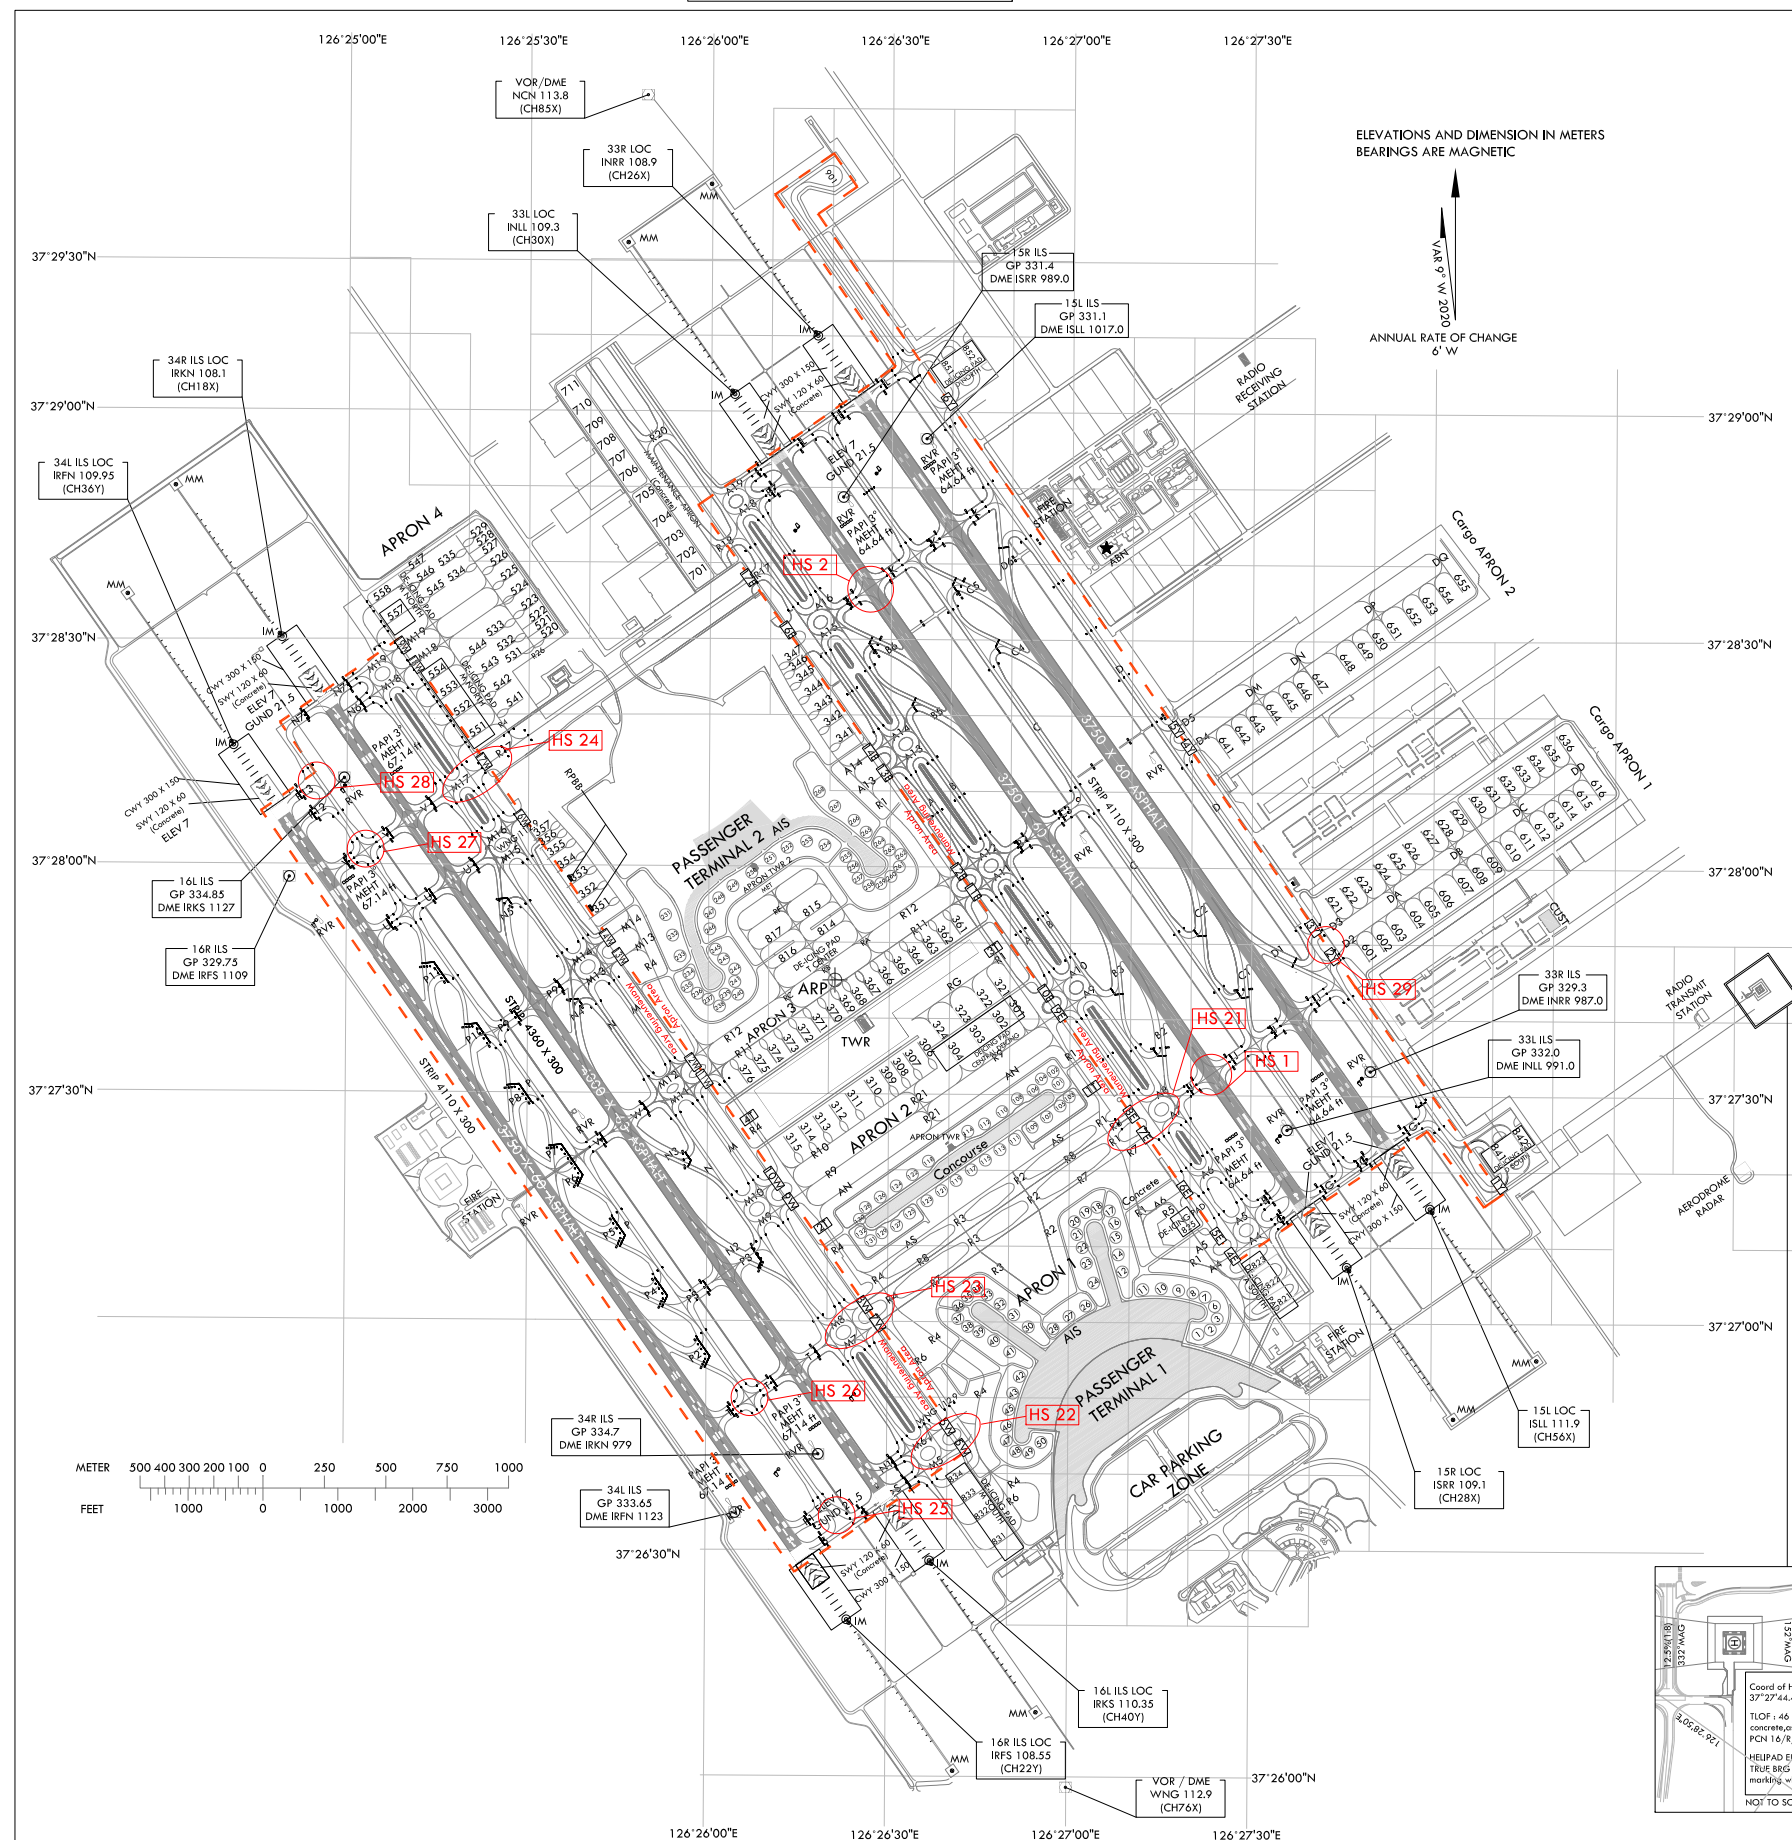



TWR	118.2(E)	118.8(W)	
GND	121.75(E)	121.7(W)	
APRON	121.65	122.175	123.675
	121.8	123.325	

SEOUL / Incheon Intl

RWY	DIRECTION (MAGNETIC)	THR	BEARING STRENGTH
15R	153°	37°28'54"N 126°26'11"E	PCN 88/F/B/X/T Asphalt
33L	333°	37°27'15"N 126°27'39"E	(SWY and 300 m RWY end are 86/R/B/X/T Concrete)
15L	153°	37°29'02"N 126°26'25"E	PCN 88/F/B/X/T Asphalt
33R	333°	37°27'23"N 126°27'53"E	(SWY and 300 m RWY end are 86/R/B/X/T Concrete)
16L	153°	37°28'22"N 126°24'56"E	PCN 75/F/B/X/T Asphalt
34R	333°	37°26'36"N 126°26'30"E	(SWY and 700 m RWY end are 85/R/B/X/T Concrete)
16R	153°	37°28'08"N 126°24'48"E	PCN 75/F/B/X/T Asphalt
34L	333°	37°26'28"N 126°26'16"E	(SWY and 842 m RWY end are 85/R/B/X/T Concrete)



TAXIWAY A, D 30 m WIDE CONCRETE PCN 86/R/B/X/T
TAXIWAY B, C 30 m WIDE ASPHALT PCN 88/R/B/X/T
TAXIWAY M 30 m WIDE CONCRETE PCN 85/R/B/X/T
TAXIWAY N 30 m WIDE ASPHALT PCN 75/F/B/X/T
TAXIWAY P 30 m WIDE ASPHALT PCN 75/F/B/X/T
PAX Terminal and Concourse A VDGs equipped

HS 1	AIRCRAFT TAXIING ON TAXIWAY J FROM RUNWAY 15L AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 15R FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 15R WITHOUT ATC AUTHORIZATION.
HS 2	AIRCRAFT TAXIING ON TAXIWAY K FROM RUNWAY 33R AFTER LANDING USE CAUTION WHEN ATC UTILIZES RUNWAY 33L FOR TAKEOFFS. DO NOT CROSS THE HOLDING MARKING FOR RUNWAY 33L WITHOUT ATC AUTHORIZATION.
HS 21 ~ 24, 29	USE CAUTION OF CONFUSION ON TAXIWAYS. DO NOT PROCEED TAXIING BEYOND TRANSFER OF CONTROL POINTS WITHOUT CLEARANCE FROM INCHEON APRON OR GROUND(TOWER).
HS 25 ~ 28	USE CAUTION OF CONFUSION ON TAXIWAYS.

LEGEND	
 WNG 112.9	VOR CHECK-POINT AND FREQUENCY
• • •	Stop-bar light
	Runway Holding Position
	
R4	Taxi lane
	Gate
201	Remote stand
	Open Channel
	ATC service boundary (Maneuvering Area)
	Transfer of Control Point (TCP)
	Hot Spot
	RPBB (Remote Passenger Boarding Bridge)

Note
Aircraft shall not taxi into maneuvering area without clearance from Incheon Tower or Ground.

MARKING AIDS RWY 15R/33L, 15L/33R, 16L/34R, 16R/34L AND EXIT TWY

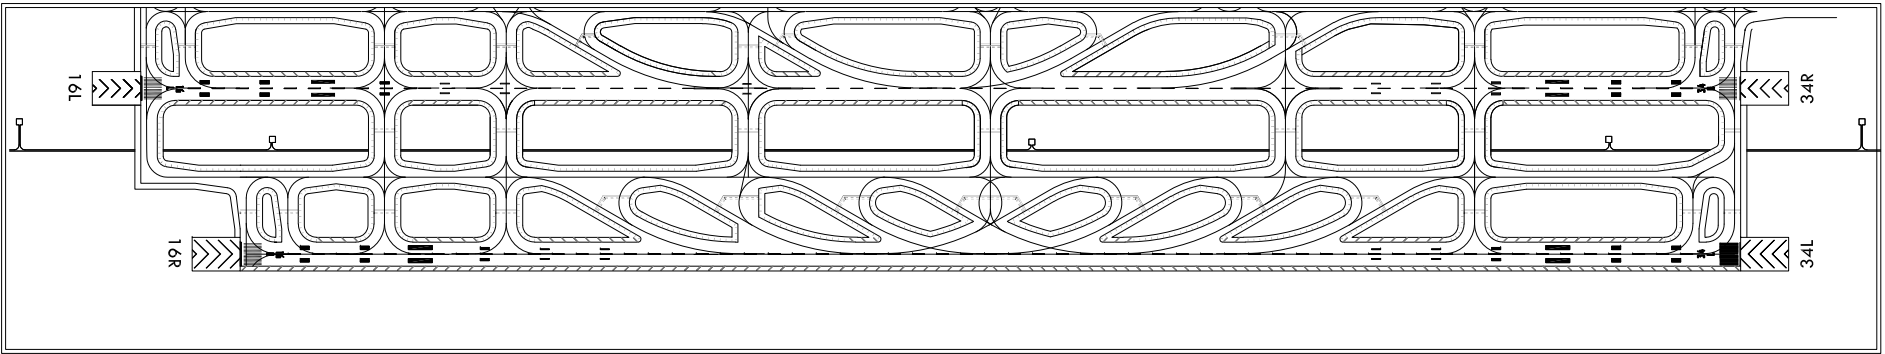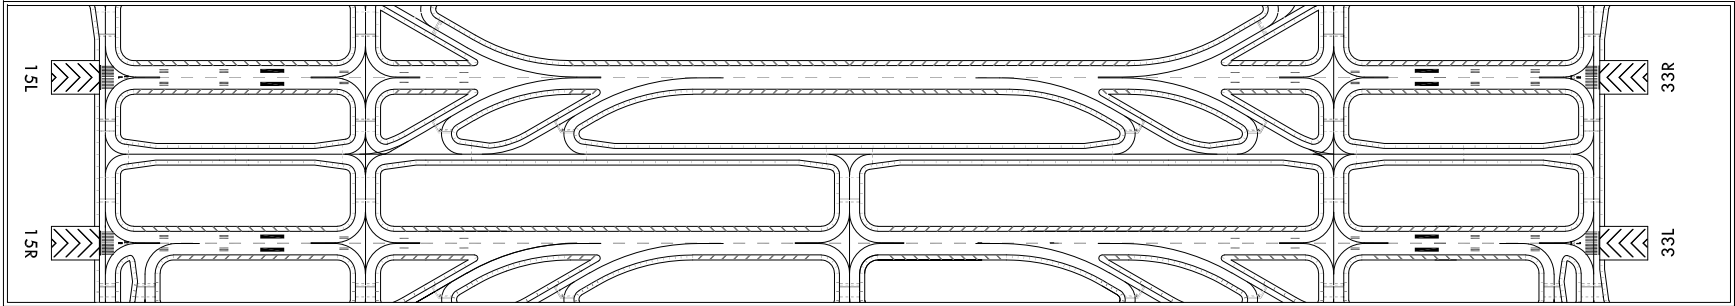

LIGHTING AIDS RWY 15R/33L, 15L/33R, 16L/34R, 16R/34L AND EXIT TWY

